## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ceiling Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30911801

| Type | of ligh | nt so | urce: |
|------|---------|-------|-------|
|------|---------|-------|-------|


| Lighting technology used:                           | LED                     | Non-directional or directional: | NDLS |
|---|-------------------------|---------------------------------|------|
| Light source cap-type (or other electric interface) | Connec-<br>tion by wire |                                 |      |
| Mains or non-mains:                                 | MLS                     | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No                      | Envelope:                       | -    |
| High luminance light source:                        | No                      |                                 |      |
| Anti-glare shield:                                  | No                      | Dimmable:                       | No   |

| Product parameters  |  |                           |  |              |  |
|---|--|---------------------------|--|--------------|--|
| Parameter   |  | Value                     | Parameter  | Value        |  |
| General product parameters:   |  |                           |  |              |  |
|   | mption in on-<br>00 h), rounded<br>st integer                                    | 32                        | Energy efficiency class  | E            |  |
| dicating if it refe<br>a sphere (360º)  | s flux (фuse), in-<br>ers to the flux in<br>, in a wide cone<br>arrow cone (90º) | 3 600 in<br>Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 6 500        |  |
| On-mode power (P <sub>on</sub> ), expressed in W  |  | 32,0                      | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00         |  |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal |  | -                         | Colour rendering in-<br>dex, rounded to the<br>nearest integer, or<br>the range of CRI-val-<br>ues that can be set   | 80           |  |
| Outer dimen-  | Height   | 500                       | Spectral power dis-  | See image    |  |
| sions without   | Width  | 220                       | tribution in the   | in last page |  |
| separate con-<br>trol gear, light-  | Depth  | 100                       | range 250 nm to 800<br>nm, at full-load  |              |  |

| ing control parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |                                |      |  |       |  |
|--|--------------------------------|------|--|-------|--|
| Claim of equivalent power <sup>(a)</sup>   |                                | -    | If yes, equivalent power (W)           | -     |  |
|  |                                |      | Chromaticity coordi-                   | 0,440 |  |
|  |                                |      | nates (x and y)                        | 0,403 |  |
| Parameters for LED and OLED light sources:   |                                |      |  |       |  |
| R9 colour rendering index value  |                                | 2    | Survival factor                        | 0,90  |  |
| the lumen maintenance factor   |                                | 0,96 |  |       |  |
| Parameters for LED and OLED mains light sources:                                       |                                |      |  |       |  |
| displacement fa  | ctor (cos φ1)                  | 1,00 | Colour consistency in McAdam ellipses  | 6     |  |
| Claims that an I replaces a flu source without last of a particul                      | orescent light integrated bal- | _(b) | If yes then replace-<br>ment claim (W) | -     |  |
| Flicker metric (P  | st LM)                         | 1,0  | Stroboscopic effect metric (SVM)       | 0,9   |  |

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

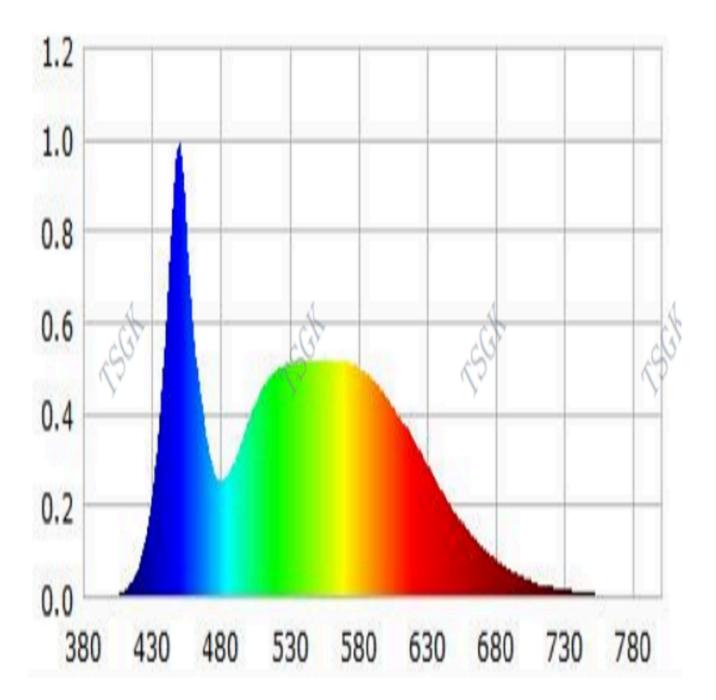

Model placed on the Union market from 25/03/2023



EPREL registration number: 1536444 <a href="https://eprel.ec.europa.eu/qr/15">https://eprel.ec.europa.eu/qr/15</a>

36444

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

**Customer care service:** 

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China