Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: table light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30901102

| Type | of lig | ht so | urce: |
|------|--------|-------|-------|
|------|--------|-------|-------|

| Lighting technology used: | LED | Non-directional or directional: | NDLS |
|-------------------------------|--------------|---------------------------------|------|
| Light source cap-type | Connec- | | |
| (or other electric interface) | tion by wire | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |


Product parameters

| Product parameters | | | | | |
|---|--|-------------------------|--|--------------|--|
| Parameter | | Value | Parameter | Value | |
| General product parameters: | | | | | |
| <u> </u> | mption in on- 00 h), rounded st integer | 2 | Energy efficiency class | F | |
| dicating if it refe a sphere (360º) | s flux (φuse), in- ers to the flux in , in a wide cone arrow cone (90º) | 200 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000 | |
| On-mode power (P _{on}), expressed in W | | 2,0 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | |
| Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal | | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 80 | |
| Outer dimen- | Height | 100 | Spectral power dis- | See image | |
| sions without | Width | 100 | tribution in the | in last page | |
| separate con- trol gear, light- | Depth | 128 | range 250 nm to 800 nm, at full-load | | |

| ing control parts and non- lighting con- trol parts, if any (millime- tre) | | | | | | |
|---|--|------|--|-------|--|--|
| Claim of equivalent power ^(a) | | - | If yes, equivalent power (W) | - | | |
| | | | Chromaticity coordi- | 0,380 | | |
| | | | nates (x and y) | 0,380 | | |
| Parameters for LED and OLED light sources: | | | | | | |
| R9 colour rendering index value | | 1 | Survival factor | 0,90 | | |
| the lumen maintenance factor | | 0,96 | | | | |
| Parameters for | Parameters for LED and OLED mains light sources: | | | | | |
| displacement fa | ctor (cos φ1) | 1,00 | Colour consistency in McAdam ellipses | 6 | | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | | _(b) | If yes then replace- ment claim (W) | - | | |
| Flicker metric (P | st LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,9 | | |

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

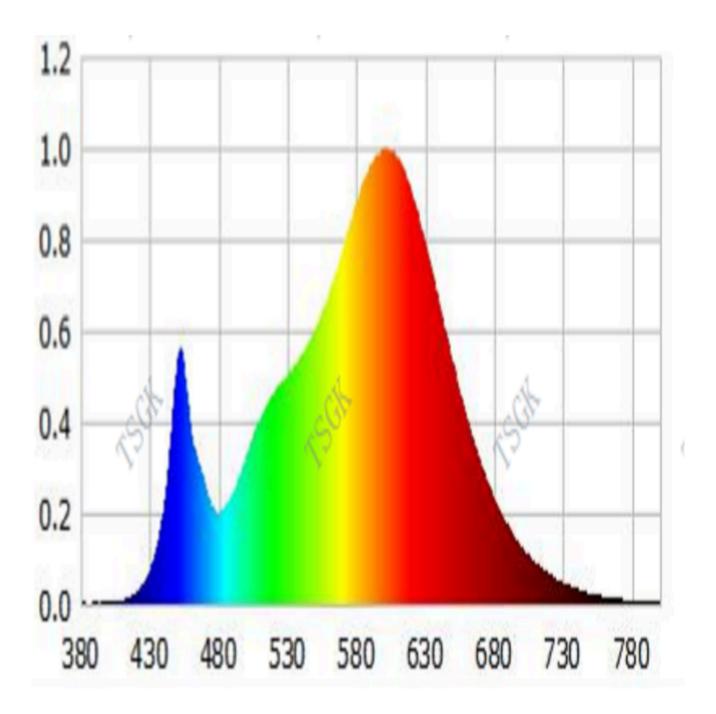

Model placed on the Union market from 05/01/2024



EPREL registration number: 1902628 https://eprel.ec.europa.eu/qr/19

02628

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

Customer care service:

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China